



【ロングタイプ】 GXKO-※-〇〇

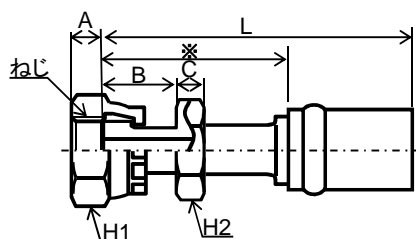


ホース	ねじ	コード	品名	H1	H2	A	B	C	L	CL	適用Oリング
6	9/16-18UNF	6404810	GXKO-0409	19	17	8	17.5	6	50	30	AS568-011
	11/16-16UN	6422376	GXKO-0411	22	17	9	18.5	6	51	31	AS568-012
9	9/16-18UNF	6424246	GXKO-0609	19	19	8.5	17.5	6	50	30	AS568-011
	11/16-16UN	6404809	GXKO-0611	22	19	9	18.5	6	51	31	AS568-012
	11/16-16UN	6427797	GXKO-100-0611	22	19	9	18.5	6	124	105	AS568-012
	13/16-16UN	6421545	GXKO-0613	27	22	10	22	6	54	35	AS568-014
12	11/16-16UN	6420264	GXKO-0811	22	22	9	18.5	10	64	35	AS568-012
	13/16-16UN	6407341	GXKO-0813	27	22	10	22	10	67	38	AS568-014
	13/16-16UN	6424667	GXKO-100-0813	27	22	10	22	7	135	106	AS568-014
	1-14UNS	6420263	GXKO-0816	32	27	10.5	24.5	9	71	42	AS568-016
15	13/16-16UN	6423954	GXKO-1013	27	27	9.5	22	9	69	40	AS568-014
	1-14UNS	6420805	GXKO-1016	32	27	10.5	24.5	9	72	42	AS568-016
	1-14UNS	6425379	GXKO-105-1016	32	27	10.5	24.5	9	141	112	AS568-016
	11/16-16UN	6432556	GXKO-1011	22	27	9	18.5	9	66	36	AS568-012
	1-3/16-12UN	6421171	GXKO-1019	36	27	11.5	27.5	9	75	45	AS568-018
19	13/16-16UN	6425859	GXKO-1213	27	27	10	22	8	79	41	AS568-014
	1-14UNS	6425125	GXKO-1216	32	27	10.5	24.5	9	80	42	AS568-016
	1-3/16-12UN	6420879	GXKO-1219	36	27	11.5	27.5	9	83	45	AS568-018
	1-3/16-12UN	6424809	GXKO-105-1219	36	27	11	27.5	9	152	114	AS568-018
	1-7/16-12UN	6424810	GXKO-1223	41	36	11.5	30	9	87	49	AS568-021
25	1-3/16-12UN	6424920	GXKO-1619	36	36	11.5	27.5	9	95	49	AS568-018
	1-7/16-12UN	6421032	GXKO-1623	41	32	11.5	30	9	95	49	AS568-021
	1-11/16-12UN	6424958	GXKO-1627	50	46	14	34	13	105	59	AS568-025

CL:ホース切断時に差し引く長さ(参考値)

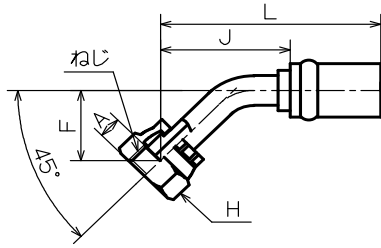


ホース	ねじ	コード	品名	H	A	F	J	L	CL	適用Oリング
6	9/16-18UNF	6404644	GX45KO-0409	19	8.5	21	41	65	46	AS568-011
	11/16-16UN	6432996	GX45KO-0411	22	9	22	61.5	86	56	AS568-012
9	11/16-16UN	6404645	GX45KO-0611	22	9	22	55	79	60	AS568-012
	13/16-16UN	6407171	GX45KO-0613	27	10	22	53	77	58	AS568-014
12	13/16-16UN	6420270	GX45KO-0813	27	10	22	51	86	57	AS568-014
	1-14UNS	6426362	GX45KO-0816	32	10.5	26	55	90	61	AS568-016
	1-3/16-12UN	6435565	GX45KO-0819	36	11.5	31	70	105	76	AS568-016
15	13/16-16UN	6425860	GX45KO-1013	27	10	22	51	87	58	AS568-014
	1-14UNS	6420803	GX45KO-1016	32	10.5	26	64	100	71	AS568-016
	1-14UNS	6421173	GX45KO-035-1016	32	10.5	35	73	109	80	AS568-016
	1-3/16-12UN	6421172	GX45KO-1019	36	11.5	26	64	100	71	AS568-018
	1-3/16-12UN	6426571	GX45KO-040-1019	36	11.5	40	94	130	101	AS568-018
19	13/16-16UN	6424785	GX45KO-1213	27	10	26	64	111	73	AS568-014
	1-14UNS	6426063	GX45KO-1216	32	10.5	26	64	111	73	AS568-016
	1-3/16-12UN	6420880	GX45KO-1219	36	11.5	26	64	111	73	AS568-016
	1-3/16-12UN	6426572	GX45KO-040-1219	36	11.5	40	92	139	101	AS568-016
	1-3/16-12UN	6426563	GX45KO-100-1219	36	11.5	100	138	185	147	AS568-016
	1-7/16-12UN	6428595	GX45KO-1223	41	11.5	32	70	117	79	AS568-021
25	1-3/16-12UN	6430085	GX45KO-1619	36	11.5	31.5	76	132	86	AS568-016
	1-7/16-12UN	6429215	GXC 45KO-1623	41	11.5	31.5	76	132	86	AS568-021

CL: ホース切断時に差し引く長さ(参考値)



ホース	ねじ	コード	品名	H	A	F	J	L	CL	適用Oリング
6	9/16-18UNF	6404646	GX90KO-0409	19	8.5	30	26	50	31	AS568-011
	9/16-18UNF	6428148	GX90KO-065-0409	19	8.5	65	26	50	31	AS568-011
	11/16-16UN	6428056	GX90KO-0411	22	9	37	46	70	51	AS568-012
9	11/16-16UN	6404647	GX90KO-0611	22	9	37	34	58	39	AS568-012
	11/16-16UN	6429299	GX90KO-050-0611	22	9	50	34	58	39	AS568-012
	11/16-16UN	6428149	GX90KO-065-0611	22	9	65	34	58	39	AS568-012
	11/16-16UN	6425495	GX90KO-075-0611	22	9	75	54	78	59	AS568-012
	11/16-16UN	6422701	GX90KO-100-0611	22	9	100	54	78	59	AS568-012
	13/16-16UN	6407172	GX90KO-0613	27	10	44	37	61	42	AS568-014
12	13/16-16UN	64202731	GX90KO-0813	27	10	44	50	85	56	AS568-014
	13/16-16UN	6426997	GX90KO-070-0813	27	10	70	52	87	58	AS568-014
	13/16-16UN	6420272	GX90KO-082-0813	27	10	82	52	87	58	AS568-014
	13/16-16UN	6420271	GX90KO-150-0813	27	10	150	52	87	58	AS568-014
	1-14UNS	6428217	GX90KO-0816	32	10.5	51	52	87	58	AS568-016
15	13/16-16UN	6423972	GX90KO-1013	27	10	44	57	93	64	AS568-014
	1-14UNS	6420804	GX90KO-1016	32	10.5	51	54	90	61	AS568-016
	1-14UNS	6421176	GX90KO-063-1016	32	10.5	63	54	90	61	AS568-016
	1-14UNS	6427094	GX90KO-075-1016	32	10.5	75	54	90	61	AS568-016
	1-14UNS	6425588	GX90KO-090-1016	32	10.5	90	54	90	61	AS568-016
	1-14UNS	6425534	GX90KO-130-1016	32	10.5	130	54	90	61	AS568-016
	1-3/16-12UN	6421174	GX90KO-1019	36	11.5	58	64	100	71	AS568-018
	1-3/16-12UN	6421175	GX90KO-070-1019	36	11.5	70	64	100	71	AS568-018
	1-3/16-12UN	6426501	GX90KO-120-1019	36	11.5	120	64	100	71	AS568-018
19	13/16-16UN	6424806	GX90KO-1213	27	10	44	57	104	66	AS568-014
	1-14UN	6424835	GX90KO-1216	32	10.5	51	54	101	63	AS568-016
	1-3/16-12UN	6420881	GX90KO-1219	36	11.5	58	64	111	73	AS568-018
	1-3/16-12UN	6424068	GX90KO-100-1219	36	11.5	100	64	111	73	AS568-018
	1-3/16-12UN	6425433	GX90KO-150-1219	36	11.5	150	64	111	73	AS568-018
	1-7/16-12UN	6425550	GX90KO-1223	41	11.5	62	64	111	73	AS568-021
25	1-3/16-12UN	6430086	GX90KO-1619	36	11.5	58	64	120	74	AS568-018
	1-7/16-12UN	6429216	GXC 90KO-1623	41	11.5	66	76	132	86	AS568-021
	1-7/16-12UN	6429366	GXC 90KO-100-1623	41	11.5	100	76	132	86	AS568-021
	1-7/16-12UN	6429367	GXC 90KO-128-1623	41	11.5	128	76	132	86	AS568-021
	1-7/16-12UN	6429404	GXB 90KO-150-1623	41	11.5	150	76	132	86	AS568-021

CL:ホース切断時に差し引く長さ(参考値)

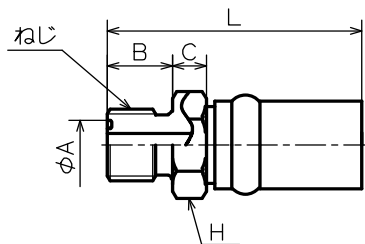

ホース	ねじ	コード	品名	H	φA	B	C	L	CL	適用Oリング
6										
9	M18P1.5	6421066	GXKA-06M18	22	13	11	8	45	24	P10
12	M26P1.5	6421528	GXKA-08M26	30	20	15	8	60	31	P16
15										
19	M32P1.5	6420878	GXKA-12M32	36	26	16	10	74	36	P22
25	M40P1.5	6421026	GXKA-16M40	41	35	17	13	88	42	P29

CL:ホース切断時に差し引く長さ(参考値)